
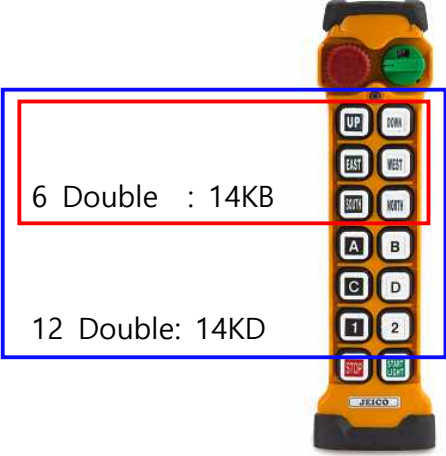


Setting Device :		Remote model :	<b>JREMO 14K</b>
Setting Place :		Supplier :	

### Crane & Hoist Double 14 P/B

#### 32 Core Cable

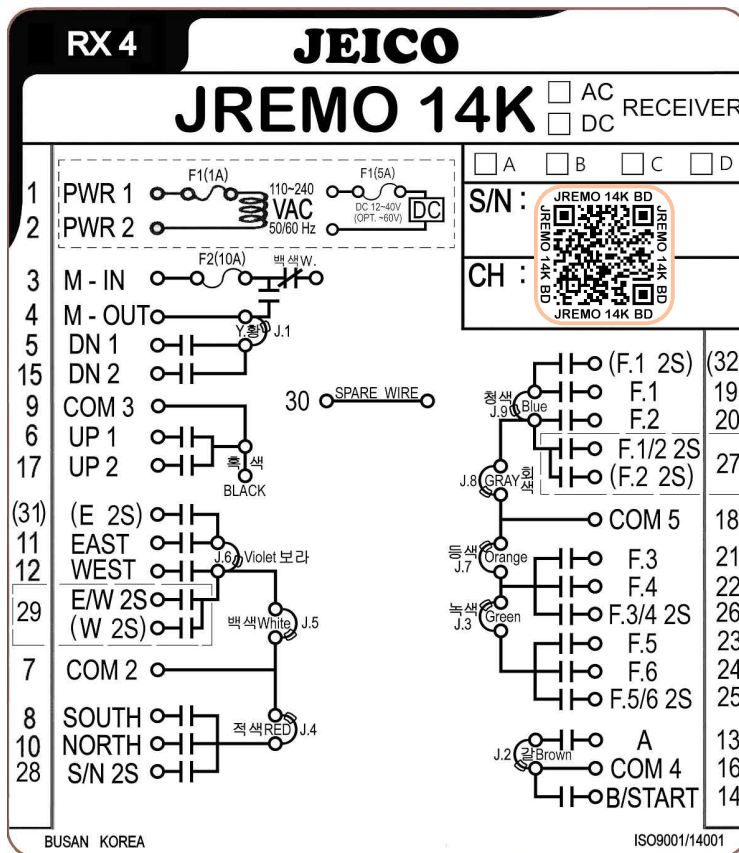

RX4 Receiver

- Tx & Rx Size
  - TX : 233 x 62 x 46 mm, approx. 450 Gr.
  - RX4: 107 x 200 x 165 mm, approx. 1,220 Gr.(Cable & Setting plate not Incl.)
  - IP level : IP55(TX), IP65(RX)
- Stanby (Standard) : EMS UP ⇔ KEY ON Stanby
  - (Option) : EMS UP ⇔ KEY ON ⇔ (P/W or P/B) Stanby
- Cable SPEC. : 0.75 SQ, 600VAC, 1.7M, Single(A,M) 24 / Double(B,C,D) 32 CORE Cable
- RELAY SPEC. : "A"CONTACT, 250VAC/5A, 125VAC /10A
- FUSE (20MM Glass fuse) 1A(F1), 10A(F2)
- POWER : - AC 100 ~ 240V 50/60Hz Free Volts (Option : AC48V,380V,440V)
  - \*RX4 receiver : Double(14KB, 14KD, 14KM)
- Standard Rx Setting : Auto off after 1 hour non-use.