


Setting Device :		Remote model :	<b>JREMO 3K M</b>
Setting Place :		Supplier :	

## Single 3P/B (DC)

9 Core Cable (Color)

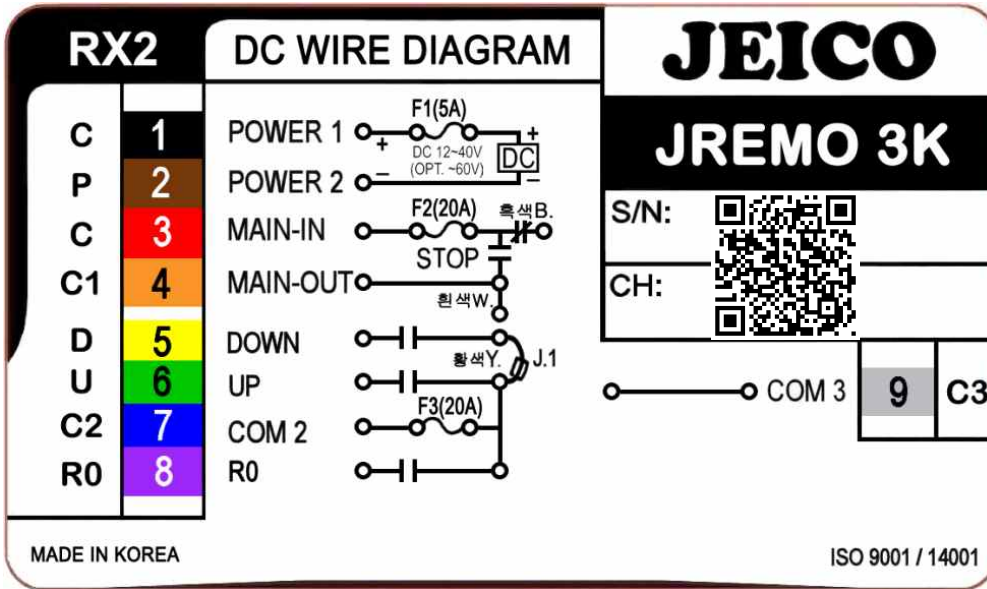

TX

RX2

- Model : JREMO 3K M : Single 3P/B (DC)
- Tx & Rx Size
  - TX : 148 x 48 x 45 mm, Approx. 175 Gr..
  - RX2 : 90 x 152 x 105 mm, Approx. 950 Gr.(Cable & Setting plate Incl.)
  - IP level : IP55(TX), IP66(RX)
- Stanby (Standard) : EMS BUTTON UP ⇔ CENTER P/B ( "A" ) PUSH
- Cable SEPC(Standard) : 0.75 SQ, 600VAC, 1.7M, 9 CORE Cable  
 (Option) : 0.75 SQ, 600VAC, 1.7M, 12 CORE Cable
- RELAY SPEC. : "A" CONTACT, 250VAC/5A, 125VAC/10A, 24VDC/5A
- FUSE (20MM Glass Fuse) 1A(F1),10A(F2)
- POWER : DC 12 ~ 40V ( JREMO 3K M model)  
 AC 100 ~ 440V 50/60Hz Free Volts (Options: AC48V)
- Standard Rx Setting : Auto off after 1 hour non-use.
- "A" P/B Setting(Standard) : START + NORMAL Setting.  
 (Option) : START + TOGGLE, INCHING Setting.